




Product NO.		RHT-702-0014			
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
R1.0	First issue	Nick	2021.12.28	JIM.KING	

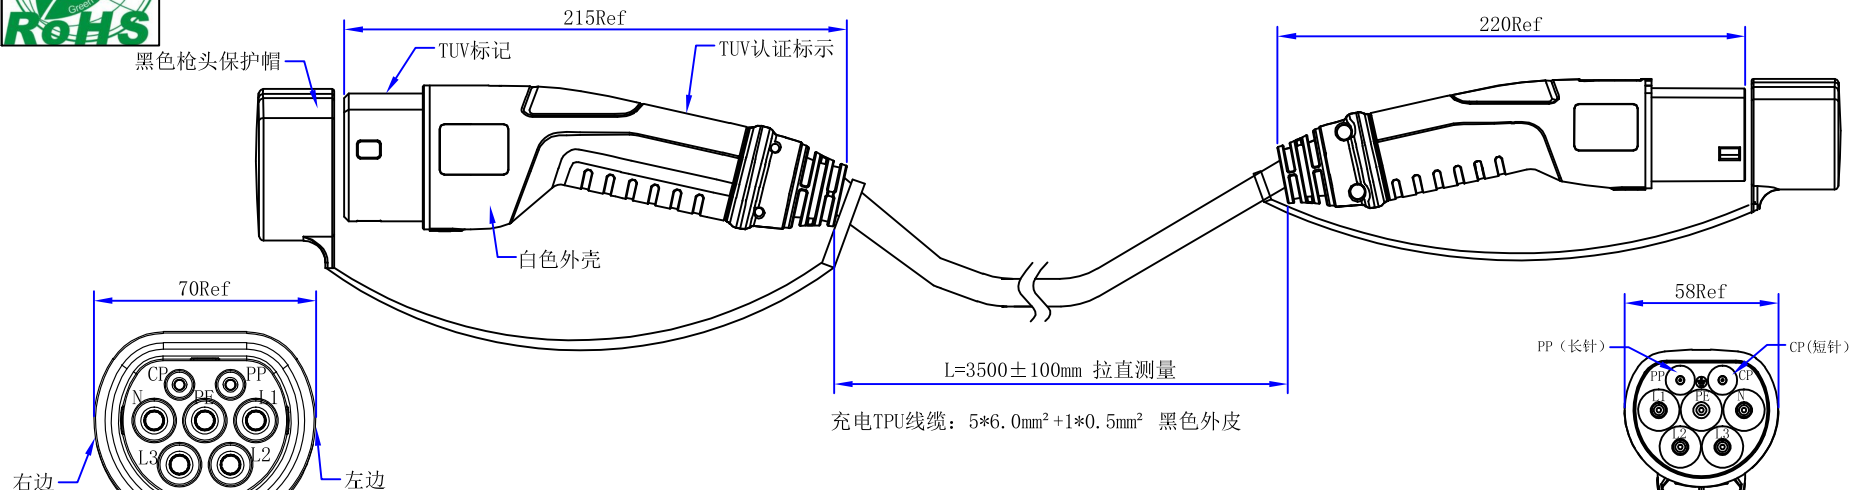

充电TPU线缆: 5*6.0mm²+1*0.5mm² 黑色外皮

接线图:

PP	R1=220 Ω	PP
PE	6.0mm ² 黄绿色	PE
L1	6.0mm ² 棕色	L1
L2	6.0mm ² 蓝色	L2
L3	6.0mm ² 灰色	L3
N	6.0mm ² 黑色	N
CP	0.5mm ² 红色	CP

桩端打标 (左侧):

交流枪 (桩端)



RENHOTECH

桩端打标 (右侧):

Renhao Weiye Technology (Wuhan) Co., Ltd
Name: plug
Number: EPT-32X
Specification: 32A 480V AC
IP class: IP54
Standard: IEC62196.2-2016

车端打标 (左侧):



RENHOTECH

车端打标 (右侧):

Renhao Weiye Technology (Wuhan) Co., Ltd
Name: vehicle connector
Number: EVT-32X
Specification: 32A 480V AC
IP class: IP54
Standard: IEC62196.2-2016

技术参数


额定电压	480V AC
额定电流	32A
环境温度	From -30°C to +50°C
绝缘电阻	L1、N与PE 1000V DC, 测试60S, 绝缘电阻>1000MΩ
耐电压	L1、N与PE 2500V AC, 测试60S, 漏电流<5mA
防护等级	IP54
机械寿命	空载插拔>10000次
插拔力(非锁止状态)	<100N

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm



RENHOTECH GROUP



PART DESCRIPTION:
32A 欧标三相连交流枪 延长线

Appr:
JIM.KING

P/N:
RHT-702-0014

Check:

Date	Scale	Unit	Type	Page
------	-------	------	------	------

Draw:
Nick

2021.12.28	Free	MM	Z	1/1
------------	------	----	---	-----